

Hi, 小伙伴你好~

我们在维护者[全网最大的计算机相关编程书籍分享仓库](#)，目前已有超过 1000本 的计算机经典书籍了。

其中涉及C/C++、Java、Python、Go语言等各种编程语言，还有数据结构与算法、操作系统、后端架构、计算机系统知识、数据库、计算机网络、设计模式、前端、汇编以及校招社招各种面经等~

只有你想不到，没有我们没分享到的计算机学习书籍，如果真的有我们没能分享到的书籍或者是你所需要的，欢迎添加下方联系方式来告诉我们，期待你的到来。

在此承诺[本仓库永不收费](#)，永远免费分享给有需要的人，希望自己的**辛苦结晶**能够帮助到曾经那些像我一样的小白、新手、在校生们，为那些曾经像我一样迷茫的人指明一条路。


**告诉他们，你是可以的！**

[本仓库](#)无偿分享各种计算机书籍、各种专业PDF资料以及个人笔记资料等，所有权归仓库作者阿秀（公众号【[拓跋阿秀](#)】）所有，如有疑问提请issue或者联系本人[forthespada@foxmail.com](mailto:forthespada@foxmail.com)，感谢~

衷心希望我以前踩过的坑，你们不要再踩，我走过的路，你们可以照着走下来。

因为从双非二本爬到字节跳动这种大厂来，太TMD难了。

QQ群：①群:1002342950、②群:826980895

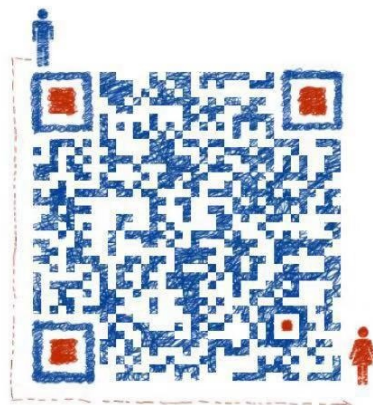

欢迎来唠嗑~



欢迎扫码关注

## Welcome to C!

In addition to bash scripts, you may have noticed a number of compiled files as you've been rummaging around. These can be identified as unreadable messes of poorly rendered symbols. You can see one by running `cat` on just about any file in `/bin`, for example `cat /bin/grep`.

This mess of symbols is a series of assembly instructions that indicate a number of operations that a processor is to perform. Obviously writing this directly is a painful and time consuming exercise, so programming languages have been developed that 'compile' down to this assembly.

As is often the starting point for learning a new language, the syntax for hello world in C is as follows:

```
#include <stdio.h>

int main() {
    printf("Hello World!\n");
    return 0;
}
```

We can also see that the function is named 'main'. This is a special function name in C such that when the code is run, the 'main' function will be the first one to be called. The `printf` function is one of the print statements in C and it sends a text stream to standard out, allowing it to interface with the rest of linux.

While it is nice to have this sitting around in a file, in order to run this code we need to compile it. There are two major (one might even say competing) C compilers: `gcc` and `clang`. The name of the compiled file can be specified using the `-o` flag as follows.

```
gcc -o hello_world hello_world.c
```

or

```
clang -o hello_world hello_world.c
```

Then you can simply execute the compiled code.

```
./hello_world
```

Try writing, compiling and running hello world in c. What does the compiled file look like?

## Question 1: Hello From C

You are to write a simple C program that will output `Hello World!` to the terminal.

```
$ ./hello
Hello World!
```

## Question 2: Meet and Greet!

Like in previous semesters, you should be familiar with being able to query the user for data via `scanner.nextLine()` or `input()` and retrieve arguments from the command line.

Write a program that will ask for the user's name and output their name mixed with a command line argument given.

```
$ ./greet Yo!
What is your name? David
Yo! David
```

For help on using the functions necessary to complete the question, you can retrieve information about the following functions `scanf` and `fgets` by using `man 3 scanf` and `man 3 fgets`.

## Question 3: Repeat

Write a program that reads characters from `stdin` and outputs them to `stdout`. For example:

```
$ ./repeat
Hello there
Hello there
^D
```

## Question 4: Echo 419

Write a program that outputs the arguments that are given to it. For example:

```
$ ./echo Echo 419 to Cortana, come in
Echo 419 to Cortana, come in
```

## C types

The C Programming language is a statically typed language, therefore any variable must have a type associated with it. You can declare variables with following types and more:

- `char` and `unsigned char`
- `int` and `unsigned int`
- `short` and `unsigned short`
- `long` and `unsigned long`
- `double`
- `float`

However, each type is defined by the cpu architecture, platform and compiler. When writing portable C code you may need to consider the differences of the primitive types between platform targets. C exposes `unsigned` types which can be prepended to integer types to eliminate the usage of the sign bit as part of the type encoding.

C provides access to memory allocations using array and pointer types. To declare an array in C you need to specify the size. C does support variable length arrays with the C99 standard however, but it is typically considered bad practice.

```
int array_1[10];  
int array_2[] = { 1, 2, 3, 4 };  
int array_3[5] = {1, 2, 3}; // Will still be 5 elements
```

Your code should not depend on this feature your compiler will typically warn you if it has been mis-used. You will be able to dynamically allocate memory using functions such as `malloc` and navigating them through a pointer type.

## Question 5: C Declarations and Initialisations

As a group, answer the following questions and discuss with your tutor about the following:

1. What are the differences between these declarations and initialisations?

```

const char * ptr = "hello";
const char array[] = "hello";
const char array2[] = { 'h', 'e', 'l', 'l', 'o' };
const char array3[] = { 'h', 'e', 'l', 'l', 'o', '\0' };
const char array4[5] = { 'h', 'e', 'l', 'l', 'o' };
const char array5[6] = { 'h', 'e', 'l', 'l', 'o', 0 };
const char array6[20] = { 'h', 'e', 'l', 'l', 'o' };
const char array7[20] = { 0 };
const char array8[20] = "hello";

```

2. Given the code above, what does the following output?

```

printf("%zu %zu\n", sizeof(ptr), sizeof(array));
printf("%zu %zu\n", sizeof(array2), sizeof(array3));

printf("%zu %zu\n", sizeof(*ptr), sizeof(&array));
printf("%zu %zu\n", sizeof(&array2), sizeof(&array3));

```

3. What does the following output, given that `sizeof(int)` is 4?

```

int x[] = { 1, 2, 3 };
int * p1 = x;
int * p2 = x + 1;
printf("%zu %zu\n", sizeof(x[0]), sizeof(x));
printf("length: %zu", sizeof(x) / sizeof(x[0]));
printf("p1 value, p2 value: %d %d\n", *p1, *p2);
printf("p1 value with offset: %d\n", *(p1 + 1));
printf("p2 value with offset: %d\n", *(p2 - 1));
printf("p1 value plus scalar: %d\n", (*p1) + 2);
printf("p1 plus offset followed: %d\n", *(p1 + 2));
printf("p1 plus offset followed: %d\n", p1[2]);

```

## Question 6: Array and Pointer equivalence

The array and pointer type holds an address as its value, a common operation on a array and pointer types are dereferencing operations ( $*$ ) which allows retrieval of the value stored at the address.

We are able to retrieve the address from a value type (as well as array and pointer types) by using the address operator ( $\&$ ). Supplying an integer value to the address, you can navigate the array or pointer using integer arithmetic, referencing and derefering operations.

Given these pointer statements, can you provide an equivalent statement?

$*p =$  \_\_\_\_\_

$*(p+10) =$  \_\_\_\_\_

$\&r[20] =$  \_\_\_\_\_

$\&(g[0]) =$  \_\_\_\_\_

$\&*p =$  \_\_\_\_\_

$p++ =$  \_\_\_\_\_

$(\&(r[5])[5]) =$  \_\_\_\_\_

What is the difference between pointers and arrays? Can we mix notation?

## Functions

As a programmer you are able to modularise your code into functions. Similar to variables, functions have a type associated as part of the function signature.

The return type of a function requires a value of the same type to be passed back to the function caller. Only `void` functions do not return any value.

Format:

```
<return type> <function_name>([<parameter type> <parameter name>,,]) {  
    //Function body  
}
```

Example:

```
int add_two(int a, int b) {  
    return a + b;  
}
```

## Question 7: Swap

Implement the swap function, your function should swap the values of a and b respectively.

```
void swap(int a[], int b[]) {  
    //  
    // TODO  
    //  
}  
  
int main(void) {  
    int a = 2;  
    int b = 3;  
    swap(a, b); //Specify the variables to swap  
    printf("%d %d\n", a, b); // should print 3 2  
  
    return 0;  
}
```

Does your program execute differently if you change swap type parameters to `int*`?

## Question 8: atoi

Implement your own atoi function that converts a given string to an integer.

```
int atoi(const char s[]) {
    //
    // TODO
    //
}

int main(void) {
    printf("%d\n", atoi(""));
    printf("%d\n", atoi("0"));
    printf("%d\n", atoi("0123"));
    printf("%d\n", atoi("1234"));
    printf("%d\n", atoi("-1234"));

    return 0;
}
```

## Question 9: Reverse

Write a program that reverses every line of input, you may assume none of the input lines are longer than 100 characters. Use the `fgets` function instead of `scanf` for this exercise because `scanf` does not distinguish between spaces, newlines and tab characters. Refer to the `isspace` function for more information.

Sample input:

```
abc 123
lorem ipsum
dolor sit amet
```

Sample output:

```
321 cba
muspi merol
tema tis rolod
```



## **Question 10: Quiz - 1**

In the last 10 minutes of the tutorial, you will be required to undertake a quiz that will test your knowledge of the previous week's content. It will be a simple assessment that corresponds to 1% of your final grade. You can access the quiz on Canvas.